

UHD5000F

Mechatronics

**Direct Drive Ultra High Speed
Overlock Machine**



Touch panel Three sensors Cutting angles
Big Operation space DLC needle bar slider



精機機械廠股份有限公司
CHING CHI MACHINE CO., LTD
<http://www.kingtexsewing.com.tw>



機型編號說明

MODEL NUMBERING

一體式直驅超高速包縫機

Mechatronics Direct Drive Ultra High Speed Overlock Machine

U H D 5 0 **F -** **- M 1 4 / U T C**

1

2

3

4

5

6

7

8

9

用途代號 /
Application Code:
0:基本型
Basic Model

針縫線數 /
Number Of Thread:
3:3線(3-Thread)
4:4線(4-Thread)
5:5線(5-Thread)
6:6線(6-Thread)

針距代號 /
Needle Distance:
0:0.
2:2.2m.m.
3:3.2m.m.
5:4.8m.m.

針縫邊寬 /
Seam Width:
3:3.0m.m.
4:4.0m.m.
5:5.0m.m.

線跡代號 /
Stitching Code:
04:#504
14:#514
16:#516
44:#544

送布齒列數 /
Rows Of Feed-Dogs:
2:2列(2 Rows)
3:3列(3 Rows)

可選擇加裝之裝置 / Optional Device:
UTC:氣動式下吸
Pneumatic Type Flat Suction chain cutter
UTD:電動式下吸
Electric Type Flat Suction chain cutter
KSC:氣動式側吸
Pneumatic Type Side Suction chain cutter

布料厚度 /
Fabrics Thickness:
M:中厚類
Medium to Heavy



機型 / Machine Type:
UHD50:一體式直驅超高速包縫機
Mechatronics Direct Drive
Ultra High Speed Overlock Machine









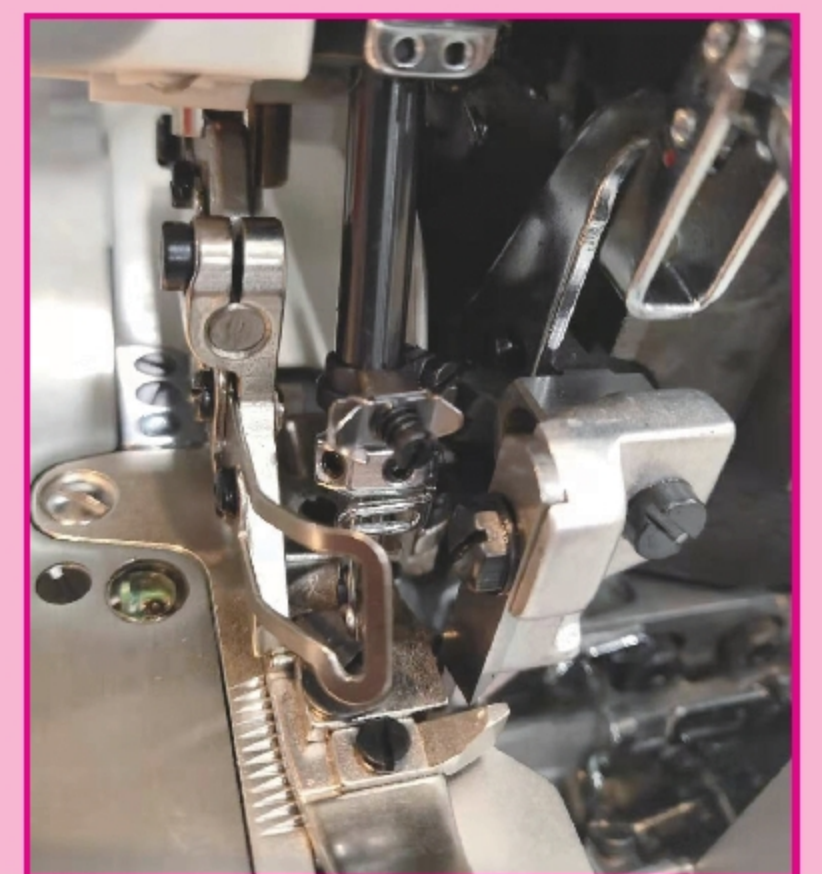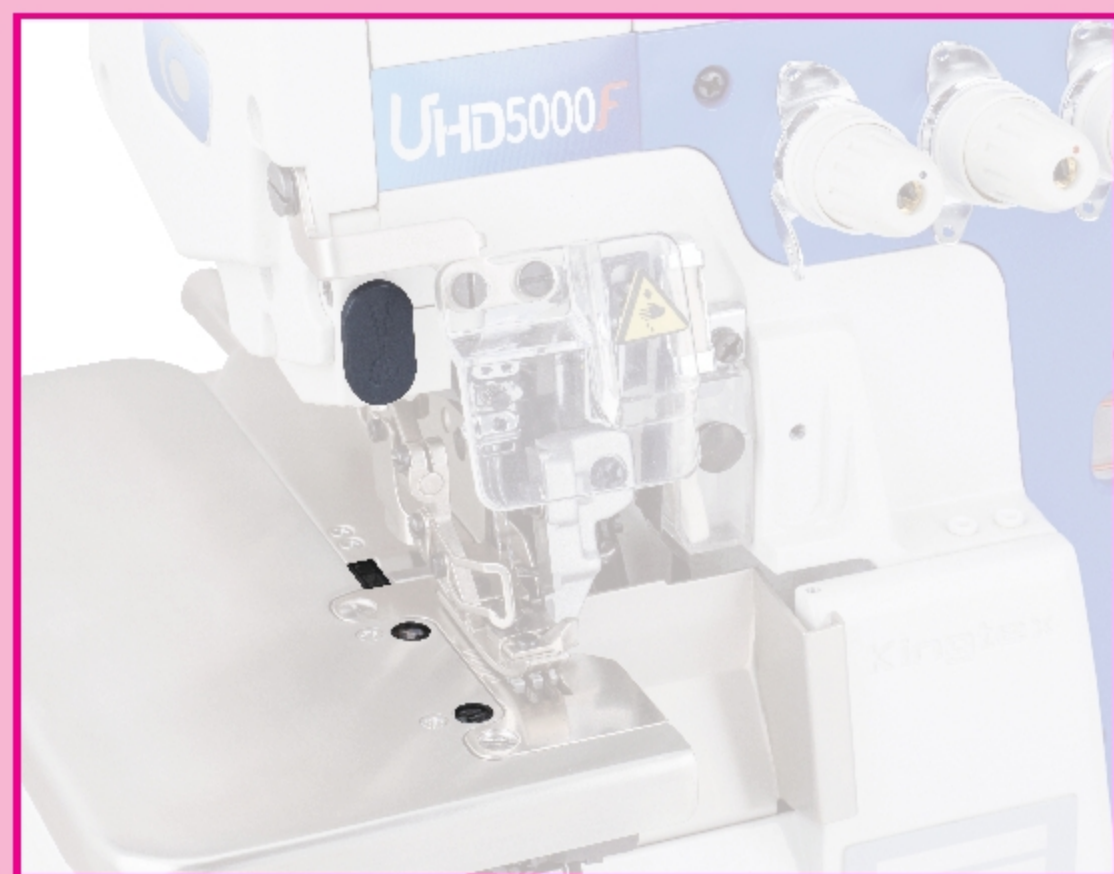

一般特性

GENERAL FEATURES



- 防偽LOGO
With anti-fake KINGTEX Logo.
- 觸控螢幕，方便美觀好用。
Touch panel design beautiful and easy to use.
- 新型三電眼接收器，整合電眼，剪線，LED，有效布邊檢測，節省馬達能源。
New three electric eye receivers, integrated electric eyes, thread trimming, LED light, effective edge detection, saving motor electricity.
- 加大空間方便車縫，壓腳機構提高至 28mm，送料順暢。
Larger feeding space, presser foot height increased to 28mm, ensures larger feeding space.
- 針杆，滑杆鍍DLC 處理，增強表面耐磨性，有效防止少油情況機器卡死現象。
DLC needle bar and DLC slider, improved worn-out resistance, preventing seize-up problem from happening, due to insufficient oil supply.
- 可調斬刀角度，任意縫線輕鬆切斷，線頭整齊美觀。
Adjustable cutting angles, easy to cut any threads, thread end neat and beautiful.



			 m.m.	 m.m.	 max.m.m.		 m.m.	 DC x 27	 S.P.M.	OPTIONAL DEVICE
UHD5003F-032-M04	1	3	-	3	3.8	0.7~2	6	#11	6000	UTC
UHD5003F-053-M04	1	3	-	5	3.8	0.7~2	6	#14	6000	UTC
UHD5004F-243-M14	2	4	2.2	4	3.8	0.7~2	5.5	#11	6000	UTD
UHD5004F-253-M14	2	4	2.2	6	3.8	0.7~2	5.5	#11	6000	KSC
UHD5005F-353-M16	2	5	3	5	3.8	0.7~2	6	#11	6000	UTC
UHD5005F-553-M16	2	5	5	5	3.8	0.7~2	6	#11	6000	UTD
UHD5006F-3243-M44	3	6	3 x 2.2	4	3.8	0.7~2	5	#11	6000	UTC
UHD5006F-5243-M44	3	6	5 x 2.2	4	3.8	0.7~2	5	#11	6000	UTD