



YouTube



微信


KA-WB/9304-24


## 環型褲腰鬆緊帶車縫


## Tubular Elastic Waist Band Attaching

## 特點/ Feature

- 標準化的車縫品質，排除人工作業的差異。只需人工上料，其餘工序自動完成  
Standardized sewing quality eliminates differences in manual work. Only manual loading, and the rest of the process is completed automatically.
- 卓越的糾偏性能，起縫與結束的線跡對齊，誤差1mm以內  
The sewing starting and ending are aligned by the tolerance of 1 mm.
- 鬆緊帶褲腰車縫分為前後工段，本機為前工段，可搭配後工段自動機，效率更高。  
Elastic waistband sewing has 2 processes. This model is for the 1<sup>st</sup> process. It is recommended to work together with the 2<sup>nd</sup> process automatic machine.



|  |   |
|--|---|
| 型號<br>Model                              | KA-WB/9304-□□   |
| 縫紉機機頭<br>Machine Head                    | UHD 9304  |
| 車縫速度<br>Sewing Speed                     | Max. 5000spm  |
| 針距規格<br>Gauge                            | 三線:04, 四線:24  |
| 適用布料<br>Applicable Material              | 針織布/彈性布<br>Knits/ Elastic fabric  |
| 應用範圍<br>Application Range                | ①鬆緊帶寬度: 1.5~4.5 cm<br>②褲腰週長: 70~180 cm<br> |
| 產能<br>Production Capacity                | 150~220 pcs/hr  |
| 電力需求<br>Power                            | 220V, 1000W   |
| 空壓需求<br>Compressed Air                   | 4 Bar, 140L/min   |
| 機器尺寸<br>Machine Dimension<br>(W x D x H) | 120 x 76 x 168 cm   |
| 淨重/毛重<br>Net/ Gross Weight               | ___ kg/ ___ kg  |

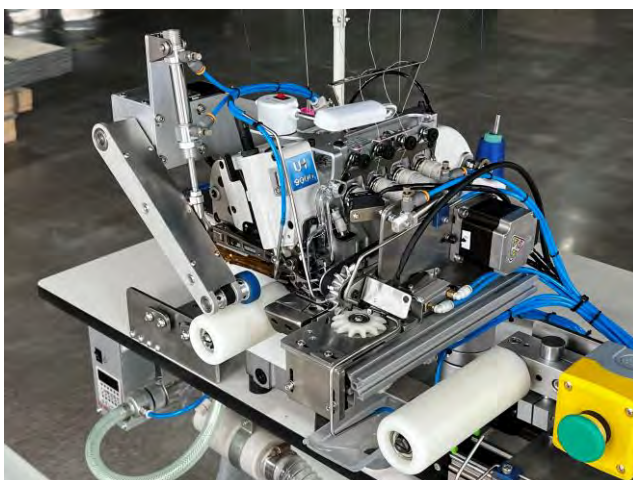



YouTube



微信


KA-WB/9000- 3 5 6


環型褲腰鬆緊帶壓縫

Tubular Elastic Waist Band Top Stitch

## 特點/ Feature

- 標準化的車縫品質，排除人工作業的差異。只需人工上料，其餘工序自動完成  
Standardized sewing quality eliminates differences in manual work. Only manual loading, and the rest of the process is completed automatically.
- 卓越的糾偏性能，起縫與結束的線跡對齊，誤差1mm以內  
The sewing starting and ending are aligned by the tolerance of 1 mm.
- 鬆緊帶褲腰車縫分為前後工段，本機為後工段，可搭配前工段自動機，效率更高。  
Elastic waistband sewing has 2 processes. This model is for the 2<sup>nd</sup> process. It is recommended to work together with the 1<sup>st</sup> process automatic machine.



|  |   |
|--|---|
| 型號<br>Model                              | KA-WB/9000-□□□  |
| 縫紉機機頭<br>Machine Head                    | CTD 9000  |
| 車縫速度<br>Sewing Speed                     | Max. 3500spm  |
| 針距規格<br>Gauge                            | 356, 364,   |
| 適用布料<br>Applicable Material              | 針織布/彈性布<br>Knits/ Elastic fabric  |
| 應用範圍<br>Application Range                | <p>①褲腰週長：70~180 cm</p> <p>②鬆緊帶寬度：1.5~4.5 cm</p>  |
| 產能<br>Production Capacity                | 150~220 pcs/hr  |
| 電力需求<br>Power                            | 220V, 1000W   |
| 空壓需求<br>Compressed Air                   | 4 Bar, 190L/min   |
| 機器尺寸<br>Machine Dimension<br>(W x D x H) | 120 x 76 x 175 cm   |
| 淨重/毛重<br>Net/ Gross Weight               | ___ kg/ ___ kg  |

