

Kingtex®

Cx | Cr

筒型繃縫機

Cylinder Bed Interlock Sewing Machine



INTERLOCK

筒型繃縫機

Cylinder Bed Interlock Machine



CX Series

CXM2000 / UCP-X



CT Series

CTD9000 / UCP-B


CT9085 - 0 - 356M / UCP - A3 / RP003 / CS002

針數 /
No of Needle

針距 /
Needle
Distance

布料厚度 / 針板舌

Fabric Thickness / Needle Plate Tongue

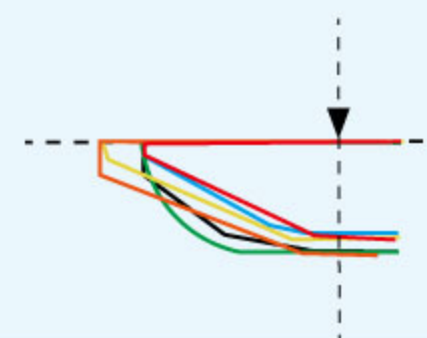

L: 薄布料
Light

M: 中
Medium

H: 厚布料
Heavy

S: 特殊
Special

S1: 特殊
Special

W: 薄平織
Light Woven


	機型 / Machine Type							車縫應用 / Application Code										選配件 / Optional Device		
	直驅 Direct- Drive	上送 Top Feeding	細筒 Small Cylinder	極細筒 Extra Small Cylinder	左切刀 Left Edge Trimmer	特厚 Extra Heavy	00 一般 General	03 上帶 Tape Binding	11 下擺 Hemming	13 壓骨 Covering	42 環帶 Tubular Band	60 四針 4-Needle Lapseam	85 右切 Right Trimme	A3 三合一 3 in 1	自動切線 Thread Trimmer	密縫 Condensed Stitch	後拖輪 Rear Puller			
CT90							●	●	●	●	●	●	●					UCP-A	CS002	
CT92						●	●									CS01P(9085)	RP003	UCE-A		
CT93					●				●							CS003				
CT97			●						●	●		●						UCP-C	CS004	RP004
CT98			●		●				●							CS04P(RP004)		UCE-C		
CTD90	●						●	●	●	●	●	●	●					UCP-B	CS002	
CTD92	●					●	●									CS01P(9085)	RP003	UCE-B		
CTD93	●				●				●							CS003				
CTD97	●		●						●	●		●						UCP-D	CS004	RP004
CTD98	●		●		●				●							CS04P(RP004)		UCE-D	CS04P	
CTU90	●	●					●		●	●		●							CS002	
CTU91	●	●		●			●		●			●							CS01P(9085)	
CTU92		●				●	●		●									UCP-F		
CTU93	●	●			●				●			●				CS004		UCE-F		
CTU97	●	●	●						●											
CTU98	●	●	●		●				●											
CTN91	M	●		●					●	●								UCP-FS		
CTM97	M		●						●	●		●				CS004	RP004	UCE-D	CS04P(RP004)	RPC04
CXM20	M						●				●	●	●	●				UCP-X	CS005	
CXM22	M					●	●									CS05P(RPC08)	RP008	UCE-X		
CXM23	M				●				●											
CXD27	●		●						●	●		●						UCP-D	CS004	RP004
CXN20	M	●					●		●	●	●	●				CS04P(RP004)	RPC04	UCE-D		
CXN22	M	●				●	●		●		●	●								
CXN23	M	●			●				●									UCP-FX		
																		UCE-FX		



直驅
Direct-Drive
CTD/CTU



一體式 / 直驅
Mechatronics
CTM/CTN/CXM/CXN

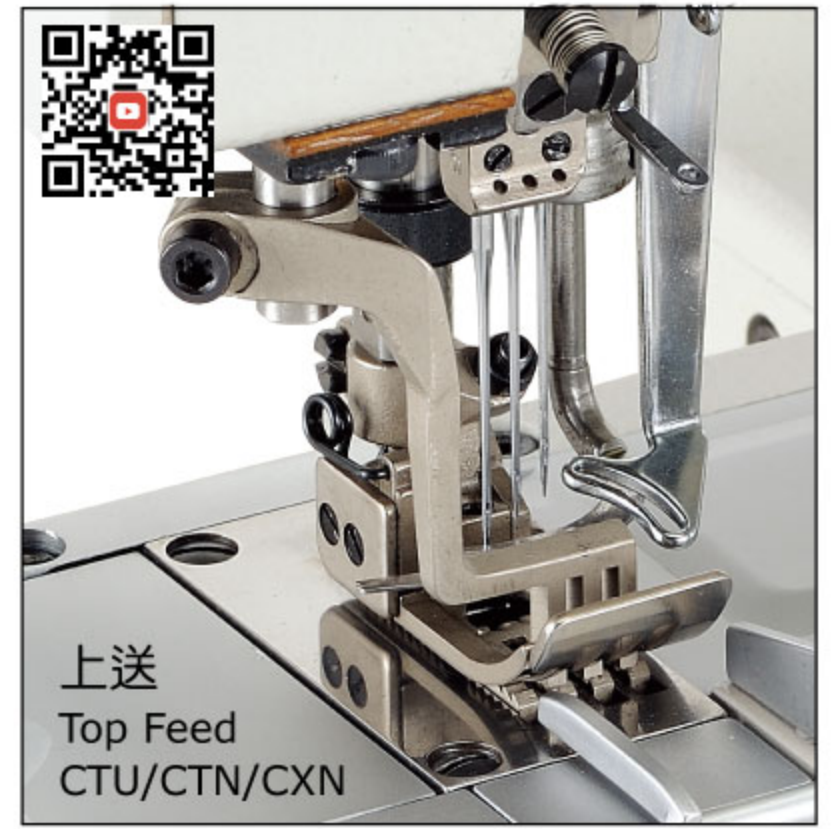

上送
Top Feed
CTU/CTN/CXN



左切刀
Left Trimmer
CT93/ CTD93/ CTU93/ CXM23




標準筒型
Standard Bed
CT90/ CTD90/ CTU90/ CXM20/ CXN





右切刀
Right Trimmer
CT90⁸⁵/ CTD90⁸⁵/ CXM20⁸⁵




細筒型左切刀
Small Cylinder Left Trimmer
CT98/ CTD98/ CTU98

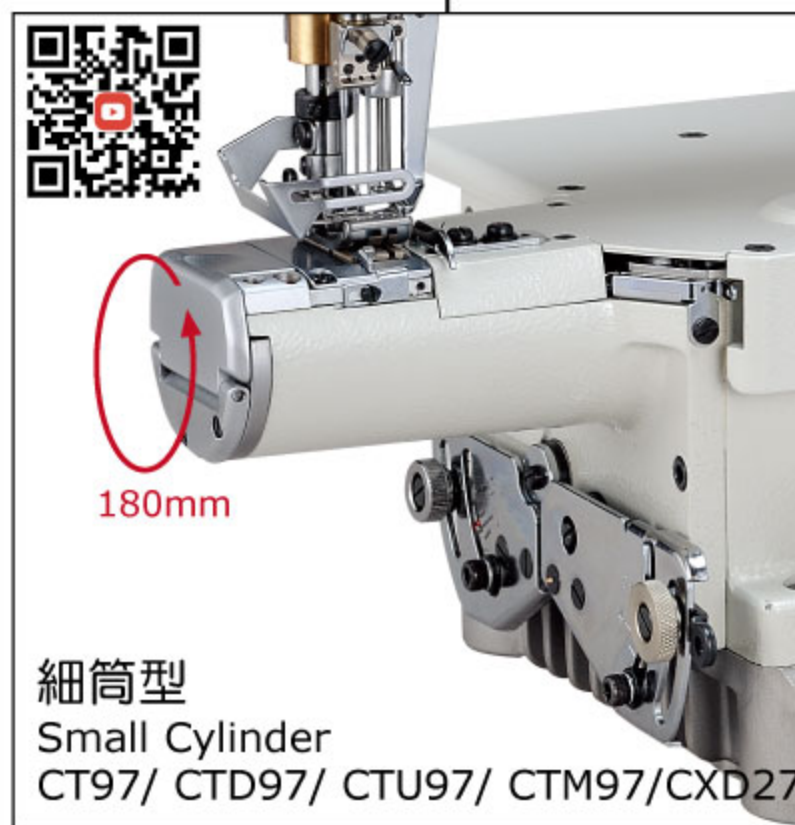







細筒型
Small Cylinder
CT97/ CTD97/ CTU97/ CTM97/CXD27

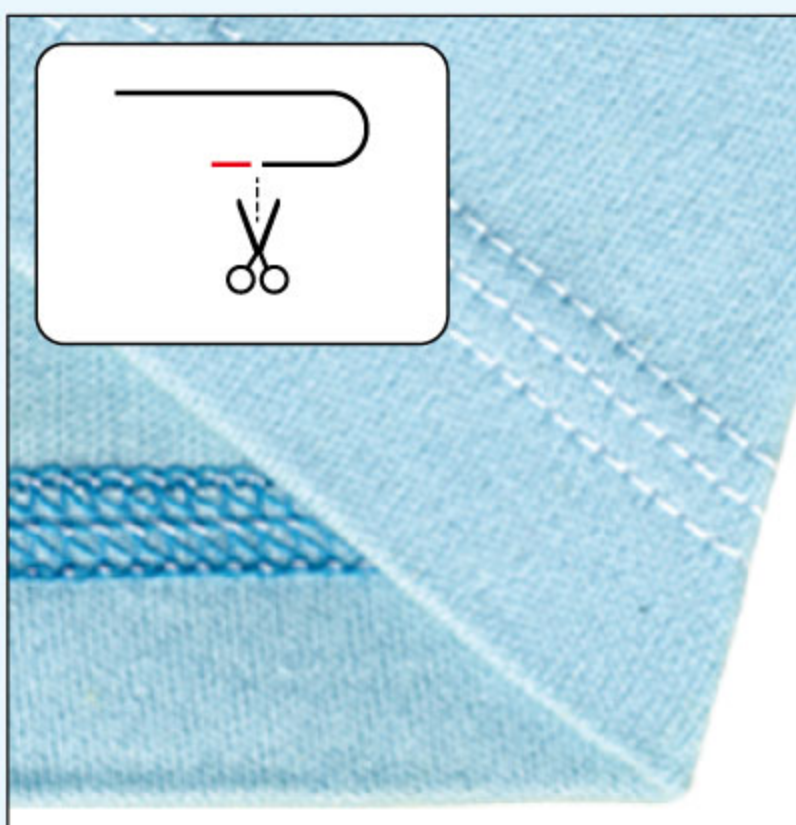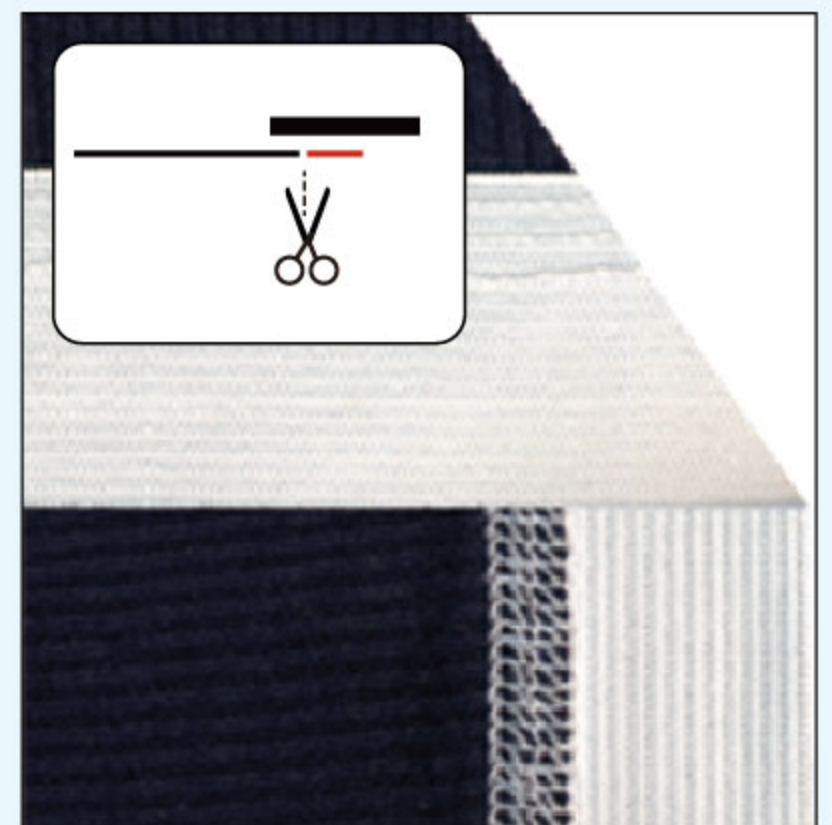


極細筒型
Extra-Small Cylinder
CTU91/ CTN91

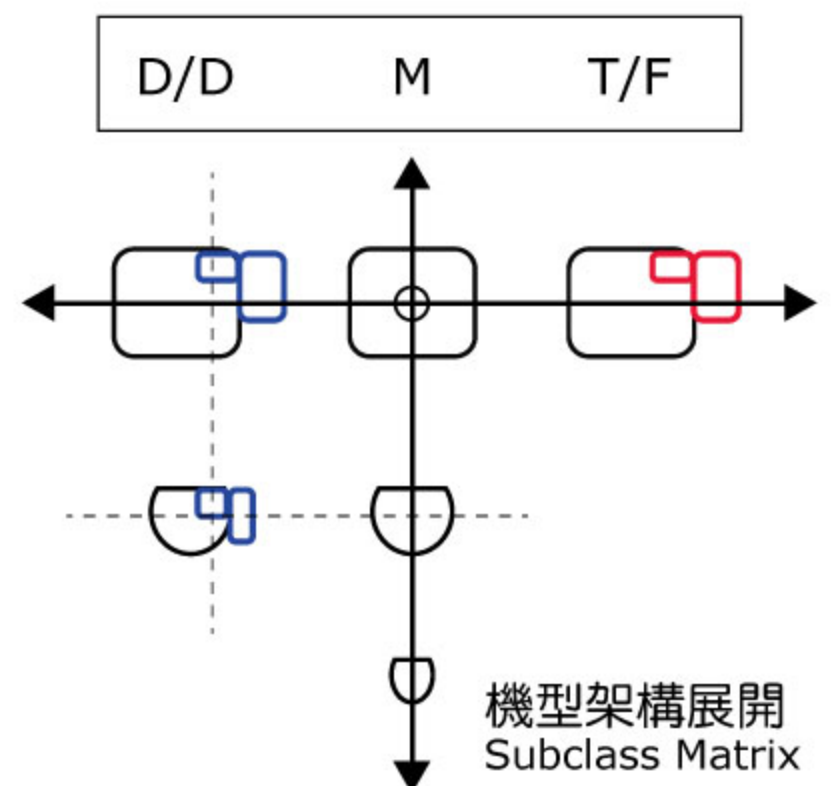

車縫應用 / SEWING APPLICATION

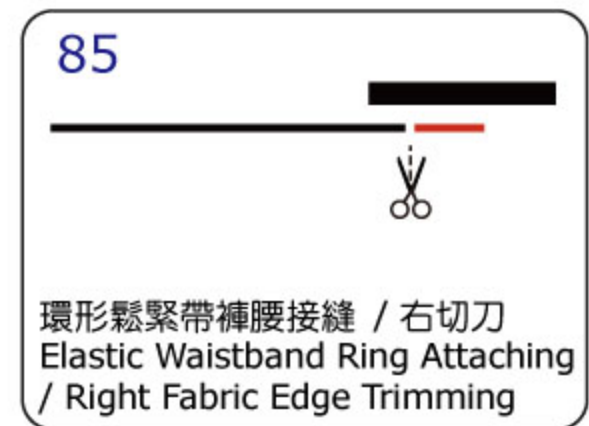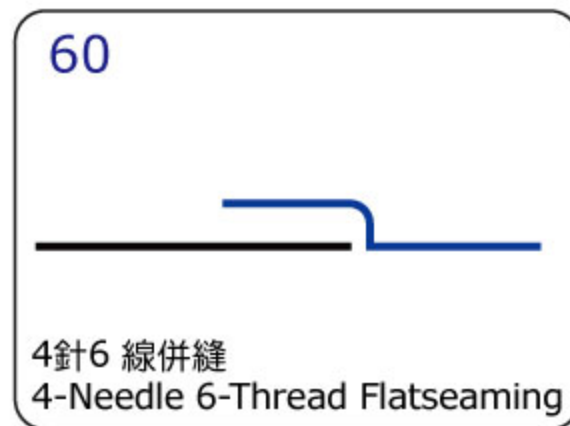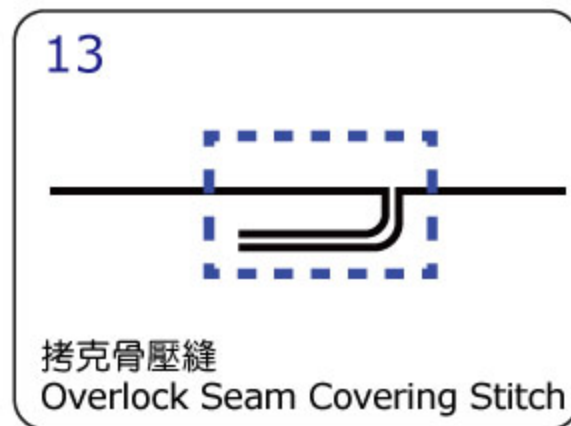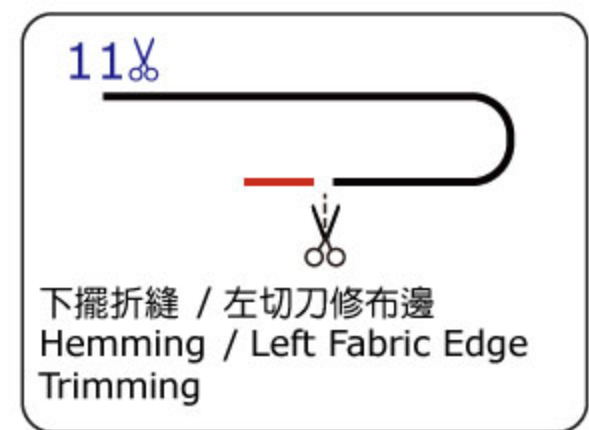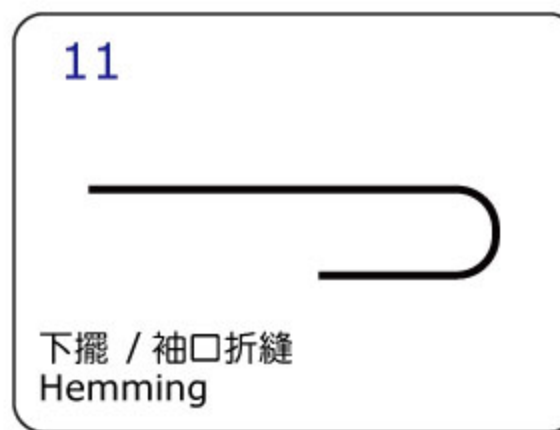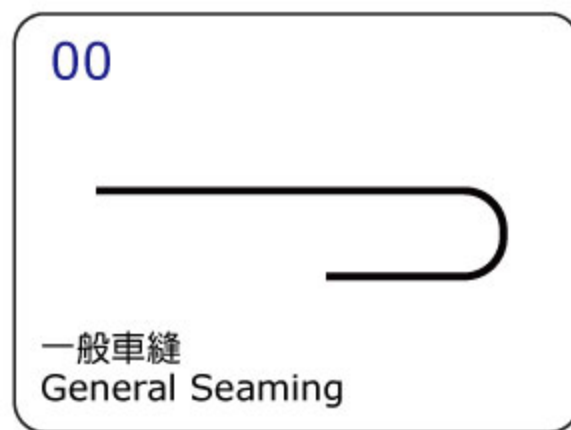

00			 m.m.	 m.m.		 m.m.	 UV128 GAS	 S.P.M.	OPTIONAL DEVICE				
CT 9000-0-□□□L CTD9000-0-□□□L	2 3	4 5	4.0/4.8 4.8/5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#10	6000	UCP-□ UCE-□ RP003				
CT 9000-0-□□□M CTD9000-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4				#11						
CT 9000-0-□□□H CTD9000-0-□□□H	2 3	4 5	4.0/4.8 4.8/5.6/6.4				#14						
CT 9000-0-□□□S CTD9000-0-□□□S	2 3	4 5	4.0 4.8/5.6/6.4				#11						
CT 9000-0-□□□S1 CTD9000-0-□□□S1	2 3	4 5	4.0 4.8/5.6/6.4										
CT 9000-0-□□□W CTD9000-0-□□□W	3	5	5.6/6.4				#14	4500					
CT 9200-0-□□□H CTD9200-0-□□□H	3	5	5.6/6.4										
CXM2000-0-□□□L	2 3	4 5	4.0/4.8 4.8/5.6/6.4				1.4~3.6	1:0.3 ? 1:2.9		5	#10	6000	UCP-X UCE-X CS005 RP008 RPC08 BOC
CXM2000-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4								#11		
CXM2000-0-□□□H	2 3	4 5	4.0 4.8/5.6/6.4	#14									
CXM2000-0-□□□H1	3	5	5.6	#14									
CXM2000-0-□□□S	2 3	4 5	4.0/4.8 4.8/5.6/6.4	#11									
CXM2000-0-□□□S1	2 3	4 5	4.0/4.8 4.8/5.6/6.4										
CXM2000-0-□□□S2	3	5	5.6/6.4										
CXM2000-0-□□□S3	3	5	5.6/6.4	#14	4500								
CXM2000-0-□□□W	3	5	5.6/6.4										
CXM2200-0-□□□H	3	5	5.6/6.4										



一般車縫
General Seaming


本機型為三針車基本規格，適用範圍含蓋薄至厚各種面料，可選配附件以進行各類車縫。

The basic model is with full specification for the all range of fabric thickness. Various devices are optional for sewing applications.



CT9000

03			 m.m.	 m.m.		 m.m.			OPTIONAL DEVICE
CT 9003-0-□□□M CTD9003-0-□□□M	2	4	3.2	1.4~3.6	1:0.3 2 1:2.9	5	#11	6000	UCP-□ UCE-□ RP003
	2	4	4.0						
	2	4	4.8						
	3	5	5.6						
	3	5	6.4						



上帶滾邊車縫 Tape Biding


本機型適用於T恤領口，運動褲褲管口之滾邊車縫。

For tape binding on the openings of T-shirt and sports short.



CT9003


11			 m.m.	 m.m.		 m.m.			OPTIONAL DEVICE
CT 9011-0-□□□M CTD9011-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	6000	UCP-□ UCE-□ RP003
	3	5	5.6/6.4						
CT 9711-0-□□□M CTD9711-0-□□□M	2	4	4.0/4.8					4500	UCP-□ UCE-□ RP004
	3	5	5.6/6.4						
CXD2711-0-□□□M	2	4	4.0/4.8					4500	UCP-D UCE-D RP004
	3	5	5.6/6.4						
CTU9111-0-□□□M	2	4	4.0/4.8					3000	UCP-FS UCE-FS
	3	5	4.8/5.6/6.4						




下擺/袖口折縫 Hemming

從下擺折縫、袖口折縫到嬰兒衣袖口折縫，有各3種規格的筒嘴（外徑：280/ 180/ 110 mm）可以對應各種車縫需求。


For the hemming of T-shirt Bottom, sleeve, and infant wear, there are 3 kinds of cylinder bed (circumference: 280/ 180/ 110 mm) to meet the demands.

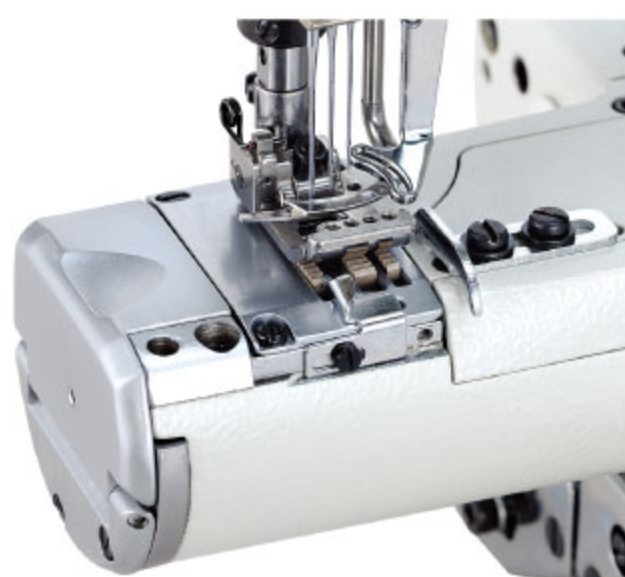

CTD9711(180mm)

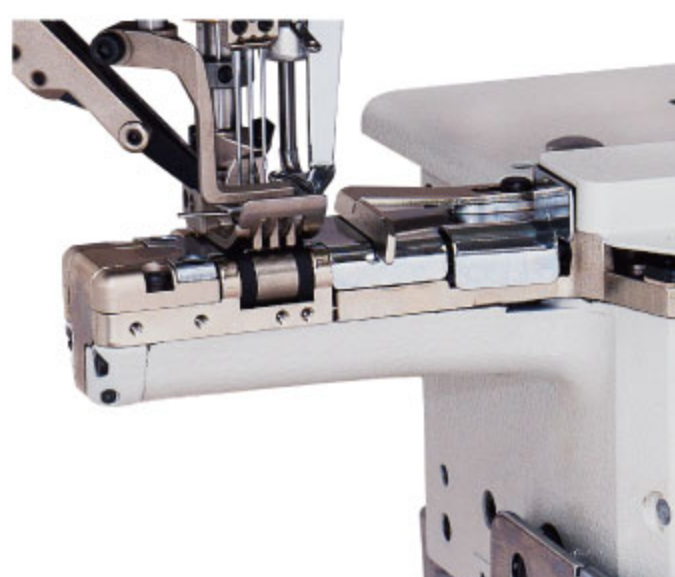


CTU9111(110mm)

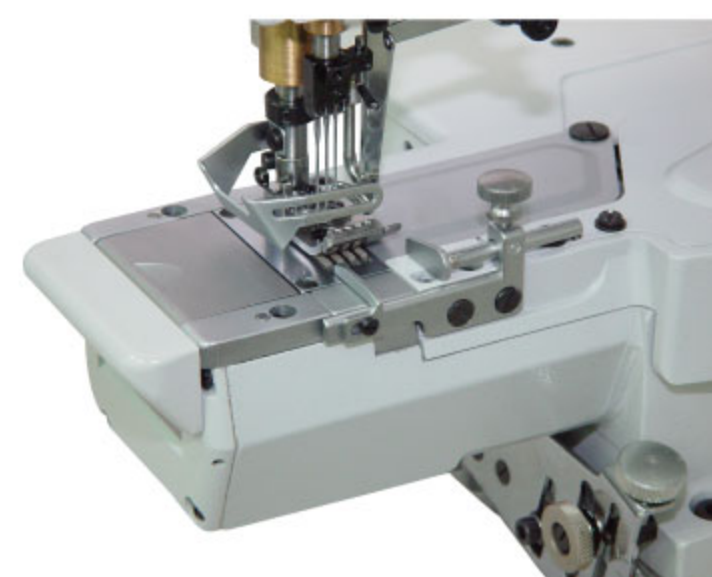

CT9011(280mm)

車縫應用 / SEWING APPLICATION

11 ✂			 m.m.	 m.m.		 m.m.	 UY128 GAS	 S.P.M.	OPTIONAL DEVICE
CT9311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-A UCE-A CV17A TR02A
CT9311-0-□□□S	3	5	4.8/5.6/6.4						
CT9311-0-□□□S1	2	4	4.0						
CT9311-0-□□□S1	3	5	4.8/5.6/6.4						
CTD9311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-B UCE-B CV17A TR02A
CTD9311-0-□□□S	3	5	5.6/6.4						
CTD9311-0-□□□S1	2	4	4.0/4.8						
CTD9311-0-□□□S1	3	5	5.6/6.4						
CTD9811-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-D UCE-D CV TR02A
CTD9811-0-□□□S	3	5	5.6/6.4						
CTD9811-0-□□□S1	2	4	4.0/4.8						
CTD9811-0-□□□S1	3	5	5.6/6.4						
CXM2311-0-□□□M	2	4	4.0/4.8	1.4~3.6	1:0.3 2 1:2.9	5	#11	4500	UCP-X5 UCP-X6 CS005 RP008 RPC08
CXM2311-0-□□□H	3	5	4.8/5.6/6.4						
CXM2311-0-□□□S	2	4	4.0						
CXM2311-0-□□□S	3	5	4.8/5.6/6.4						
CXM2311-0-□□□S1	2	4	4.0						
CXM2311-0-□□□S1	3	5	4.8/5.6/6.4						
CXM2311-0-356L	3	5	5.6						
CXM2311-0-356S2	3	5	5.6/6.4						



下擺/左切刀修布邊 Hemming / Left fabric edge trimmer





在進行下擺折縫之前，先以左切刀修齊布邊，以達完美的車縫品質。


另外，CTD9811 與 CXM2311標配吹氣式防捲布功能。

Hemming with pre-cutting function by the left fabric edge trimmer.


Moreover, CTD9811 and CXM2311 are equipped with air-blow type anti-curling edge function.

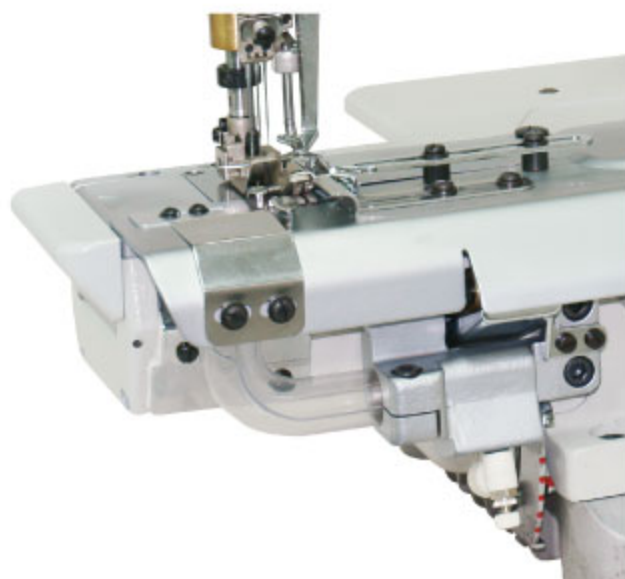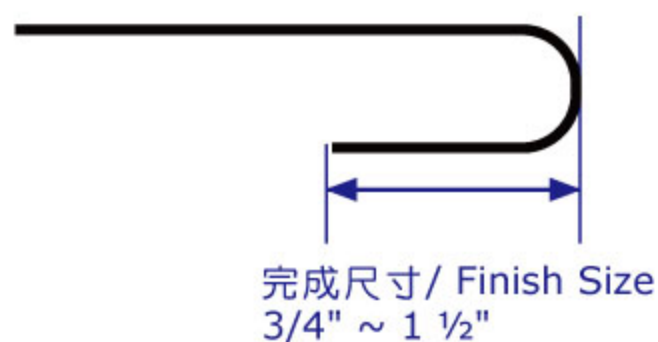


CT9311 / CTD9311

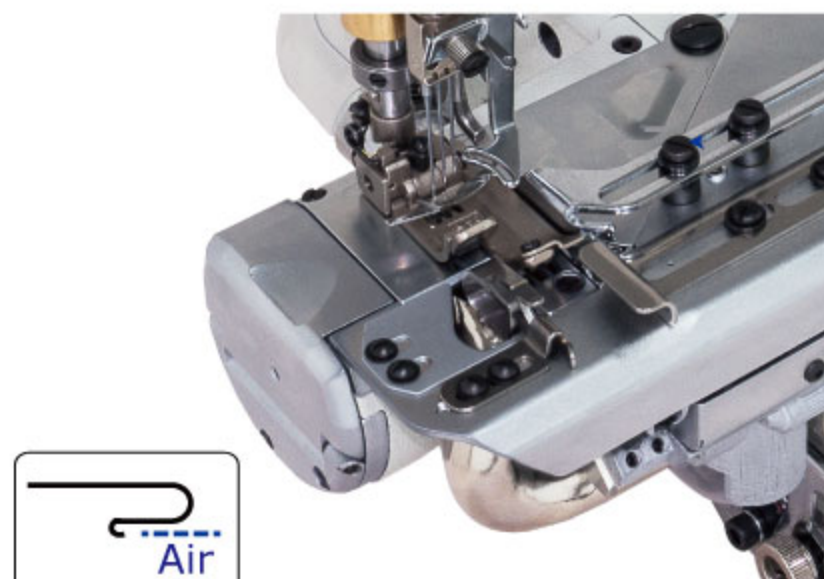


CTD9811

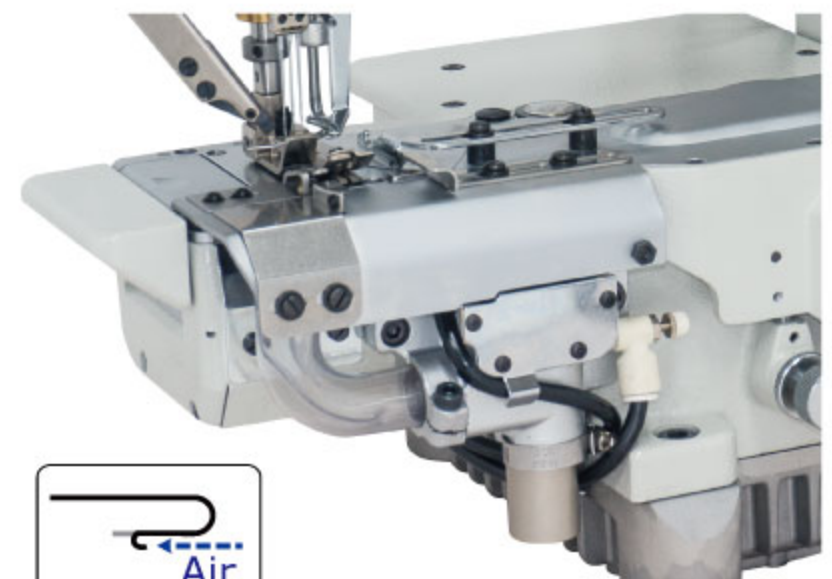

CXM2311

13			 m.m.	 m.m.		 m.m.	 UV128 GAS	 S.P.M.	OPTIONAL DEVICE
CT 9013-0-□□□M CTD9013-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	6000	UCP-□ UCE-□ RP003
CT 9013-1-□□□M CTD9013-1-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4						
CT 9013-2-□□□M CTD9013-2-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CT 9713-0-□□□M CTD9713-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CT 9713-1-□□□M CTD9713-1-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	6000	UCP-□ UCE-□ RP004
CT 9713-2-□□□M CTD9713-2-□□□M	3 3	5 5	4.0 4.8/5.6/6.4						
CXD2713-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CXD2713-1-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CXD2713-2-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	6000	UCP-D UCE-D RP004 RPC04
CXM2013-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CXM2013-1-□□□M	2 3	4 5	4.0 4.8/5.6/6.4						
CXM2013-2-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4						




拷克骨壓縫

Overlock Seam Covering Stitch

拷克骨壓縫有倒骨式(適用4線拷克)，
與立骨式(適用3線拷克)

Overlock seam covering stitch by
Fold type
(4-thread overlock seam applicable)
and Flattening type
(3-thread overlock seam applicable)

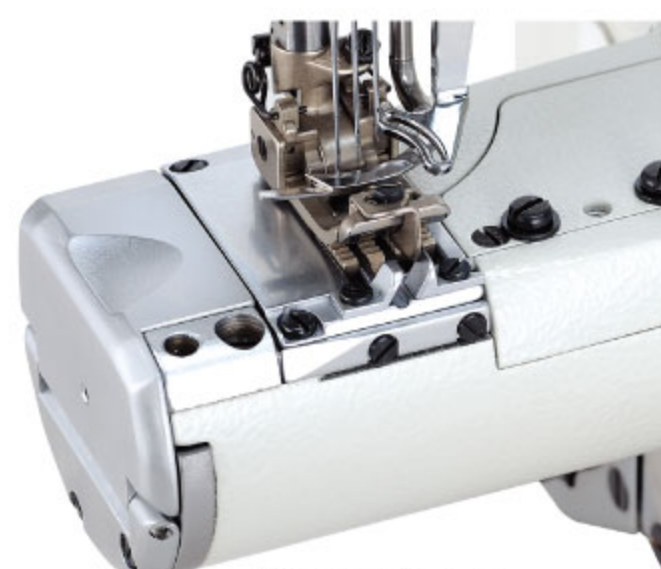



CT9713-0



CXM2013-2

13-0

倒骨式
Fold type

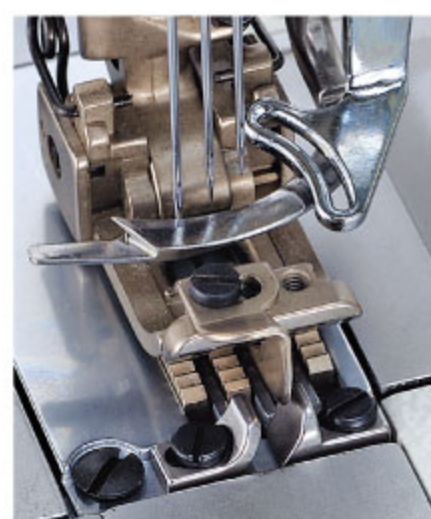

13-1

立骨式
Flattening type




13-2

倒骨式
Fold type



車縫應用 / SEWING APPLICATION

42									OPTIONAL DEVICE
CT 9042-0-3□□M CTD9042-0-3□□M	3	5	5.6 6.4	1.4~3.6	1:0.3 2 1:2.9	5	#11	5500	UCP-□ UCE-□ RP003
CT 9042-2-3□□M CTD9042-2-3□□M	3	5	5.6 6.4						
CXM2042-2-3□□M	3	5	5.6 6.4	1.4~3.6	1:0.3 2 1:2.9	5	#11	5500	UCP-X UCE-X RP008 CS005




環形針織褲腰鬆緊帶接縫 Knitted Elastic Ring Attaching



導布器以膝動開關操作，由空壓設備提供動力，有氣動閥式(42-0)與機械閥式(42-2)可供選擇


The tape guide is controlled by knee switch and is powered by air compressor. The options are pneumatic valve type (42-0) and mechanical valve type (42-2).

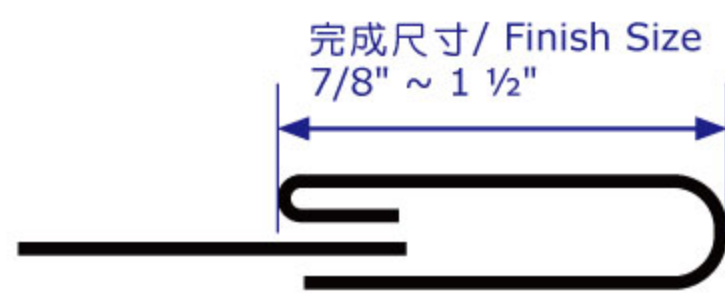


CT9042-0 (氣動式/Pneumatic type)



CT9042-2 (膝動式/Manual type)

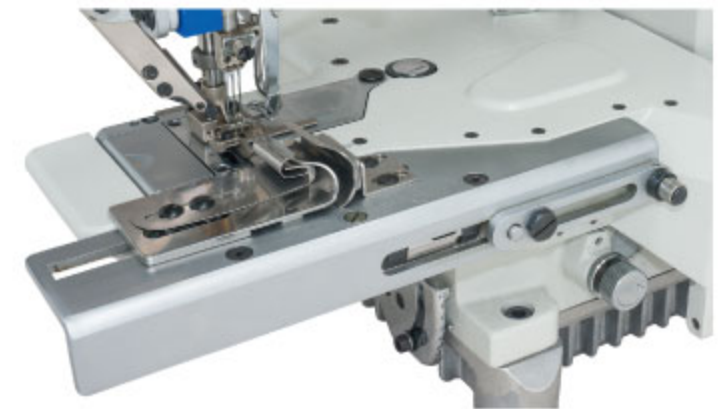

CXM2042-2 (膝動式/Manual type)

60									OPTIONAL DEVICE
CT 9060-0-4□□M CTD9060-0-4□□M CXM2060-0-4□□M	4	6	5.2/5.6 6.0/6.4	1.4~3.6	1:0.7 2 1:2.0	5	#11	6000	UCP-□□
CT 9760-0-4□□M CTD9760-0-4□□M CXD2760-0-4□□M			5.6/6.0/6.4						




四針六線併縫 4-Needle 6-Thread Flatseaming




CT9760



CT9060

85			 m.m.	 m.m.		 m.m.	 UV128 GAS	 S.P.M.	OPTIONAL DEVICE
CT9085-0-240-M CT9085-0-248-M CT9085-0-356-M CT9085-0-364-M	2 2 3 3	4 4 5 5	4.0 4.8 5.6 6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	4500	UCP-A RP003 CS005
CTD9085-0-240-M CTD9085-0-248-M CTD9085-0-356-M CTD9085-0-364-M	2 2 3 3	4 4 5 5	4.0 4.8 5.6 6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	4500	UCP-B RP003 CS005
CXM2085-0-240-M CXM2085-0-248-M CXM2085-0-356-M CXM2085-0-364-M	2 2 3 3	4 4 5 5	4.0 4.8 5.6 6.4	1.4~3.6	1:0.3 ? 1:2.9	5	#11	4500	UCP-X RP008 CS005




環形鬆緊帶褲腰接縫/右切刀修布邊 Elastic Waistband Ring Attaching/ Right Fabric Edge Trimming




在進行環形鬆緊帶褲腰接縫之前，先以右切刀修齊布邊，以達完美的車縫品質。

另外，CXM2085 標配吹氣式壓腳，具有防捲布功能。

Elastic waistband ring attaching with pre-cutting function by the right fabric edge trimmer.
Moreover, CXM 2085 is equipped with air-blow type presser foot for anti-curling edge function.

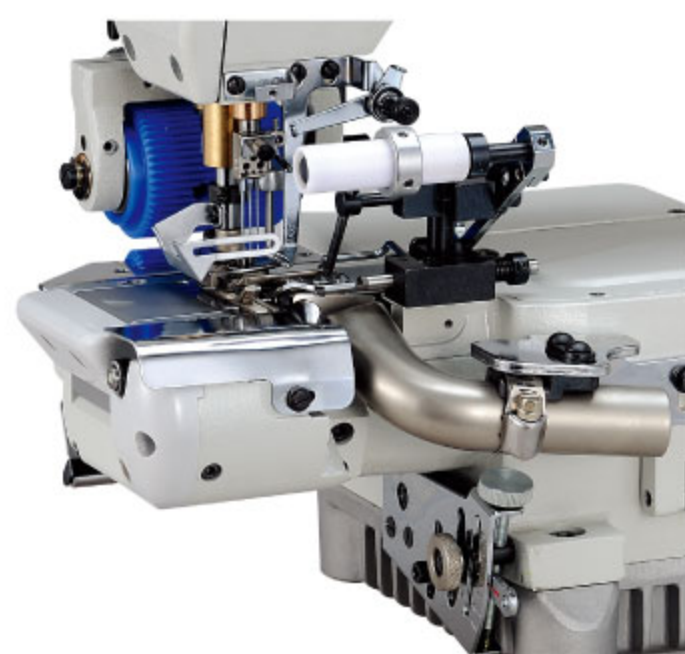

CT9085 / CTD9085


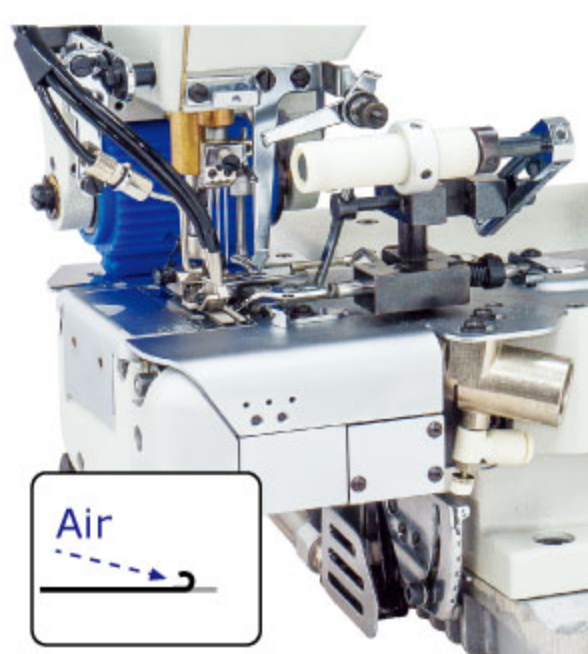


CXM2085



AF001: Air-blow type Presser foot

車縫應用 / SEWING APPLICATION

U / N			 m.m.	 m.m.			 m.m.	 UY128 GAS	 S.P.M.	OPTIONAL DEVICE	SEWING APPLIC- ATION
CTU9011-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3~ 1:2.9	1~6	5	#11	5500	UCP-FB UCE-FB	11
CTU9111-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4	0.8~3.3		1~6	5	#11	3000	UCP-FS UCE-FS	11
CTU9160-0-□□□M	4	6	6.0					MY1014B #11	3000	UCP-FSA UCE-FSC	60
CTU9711-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3~ 1:2.9	1~6	5	#11	4500	UCP-FD UCE-FD	11
CXN2000-0-□□□M	3	5	5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	6000	UCP-FX UCE-FX	00
CXN2000-0-□□□H	3	5	5.6/6.4								
CXN2000-0-356H1	3	5	5.6								
CXN2000-0-□□□W	3	5	5.6/6.4								
CXN2000-0-□□□L	3	5	5.6/6.4								
CXN2000-0-□□□S	3	5	5.6/6.4								
CXN2000-0-□□□S1	3	5	5.6/6.4								
CXN2000-0-□□□S2	3	5	5.6/6.4								
CXN2000-0-□□□S3	3	5	5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	6000	UCP-FX1 UCE-FX1	11
CXN2011-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2011-0-□□□L	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2011-0-□□□S	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2011-0-□□□S1	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2011-0-□□□H	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2011-0-□□□W	3	5	5.6/6.4					#14 #11			
CXN2013-0-□□□M	3	5	5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	6000	UCP-FX1 UCE-FX1	13
CXN2013-1-□□□M	3	5	5.6/6.4								
CXN2013-2-□□□M	3	5	5.6/6.4								
CXN2060-0-460M	4	6	6.0	1.4~3.6	1:0.3~ 1:2.9	1~6	5	MY1014B #11	5500	UCP-FXA	60
CXN2200-0-□□□H	3	5	5.6/6.4	1.4~3.6		1~6	5	#14	4500	UCP-FX1 UCE-FX1	00



上送機型
Top Feed Models



CXN2000



CTU9711



CTU9111



U / N			 m.m.	 m.m.			 m.m.	UY128 GAS 	 S.P.M.	OPTIONAL DEVICE	SEWING APPLIC- ATION
CTU9311-0-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4	1.4~3.6	1:0.3~ 1:2.9	1~6	5	#11	4500	UCP-FB UCE-FB	11 
CTU9811-0-□□□M	2 3	4 5	4.0 4.8/5.6/6.4	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	4500	UCP-FD UCE-FD	11 
CTU9811-0-□□□S	2 3	4 5	4.0 4.8/5.6/6.4								
CTU9811-0-□□□S1	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2311-0-□□□M CXN2311-1-□□□M	2 3	4 5	4.0/4.8 4.8/5.6/6.4								
CXN2311-0-356L	3	5	5.6	1.4~3.6	1:0.3 ? 1:2.9	1~6	5	#11	5000	UCP-FX5 UCE-FX6	11 
CXN2311-0-□□□S CXN2311-1-□□□S	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2311-0-□□□S1 CXN2311-1-□□□S1	2 3	4 5	4.0 4.8/5.6/6.4								
CXN2311-0-□□□S2	3	5	5.6/6.4								
CXN2311-0-□□□H CXN2311-1-□□□H	2 3	4 5	4.0/4.8 4.8/5.6/6.4								



上送機型 Top Feed Models

上送並搭配左切刀的高階機型，具有豐富規格，可對應各種車縫情形。

The high-end models of top feeding with left fabric edge trimmer, which have a wide range of specifications, can be used in various sewing situations.




CTU9311








CTU9811



CTU9111

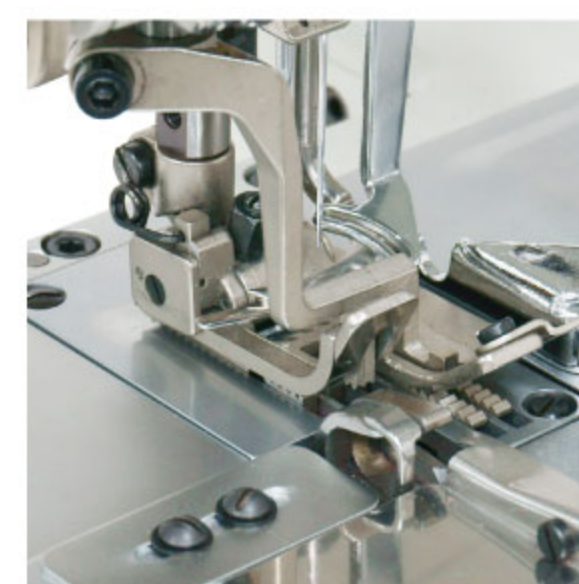

CTU9311

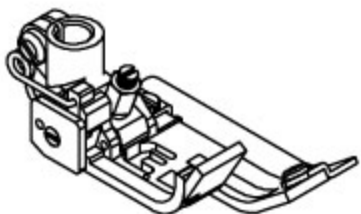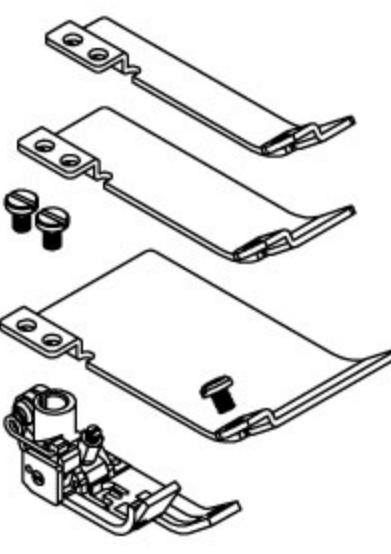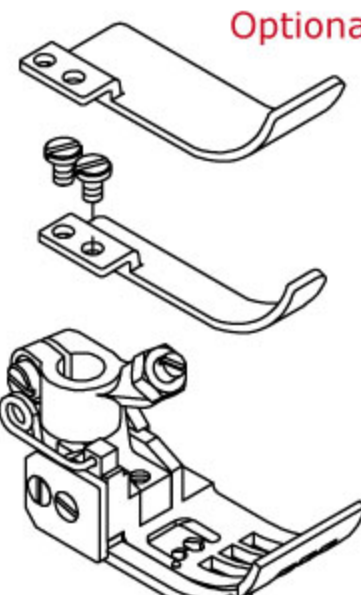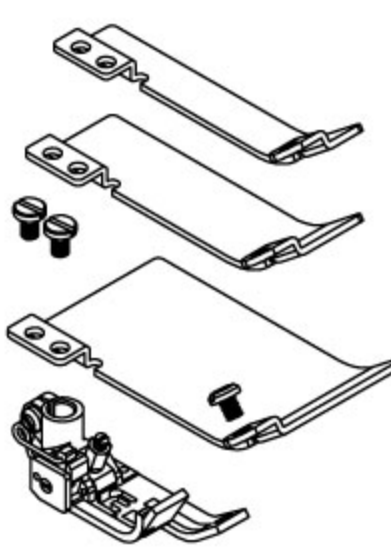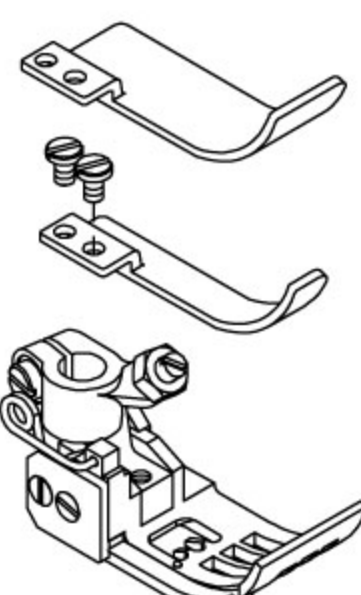
	CTU9311	CTU9811		CXN2311-0	CXN2311-1
上送齒 Top Feed Deg			 Optional		
壓腳 Presser Foot			 Optional		

選配件 / OPTIONAL DEVICE

自動切線組 Auto Thread Trimmer Set

UCE-A1 1 2 3 4	① 自動切線裝置代號 Under bed thread trimmer device
	② 機型 C:方筒型繡縫機 F:平台型繡縫機 Model C:Cylinder bed interlock F:Flat bed interlock
	③ 動力 P:氣動式 E:電動式 Power P:Pneumatic Type E:Electric Type
	④ 裝置組合代號 Combination of devices

UCP-□□ UCE-□□

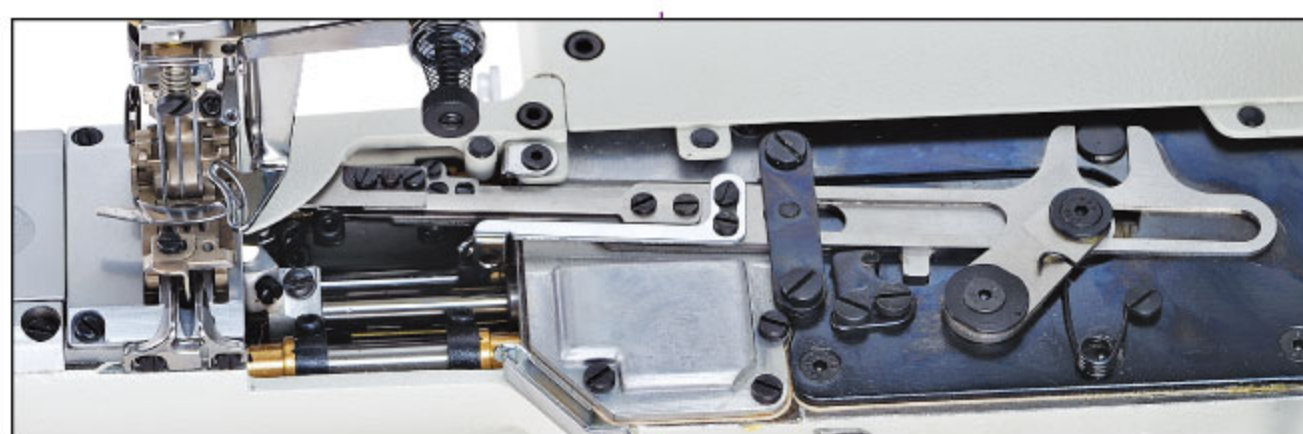

UTB□□, UTG□□
UTH□□



UTC□□

電動式切線組 Elastic Type Thread Trimmer

UCE -□□	下切 Under Trimmer	上切 Top Trimmer	撥線 Wiper (WPG)	抬壓腳 Presser Foot Lifter	適用機型 Application
A1	UTC04	STC02		✓	CT9000
A2			✓		
A3		STC02	✓*		
A4					
B1	UTC03	STC03		✓	CTD9000
B2			✓		
B3		STC03	✓*		
B4					
C1	UTC06	STC02		✓	CT9700
C2			✓		
C3		STC02	✓*		
C4					
D1	UTC07	STC03		✓	CTD9711 CXD2711
D2			✓		
D3		STC03	✓*		
D4					
X1	UTC09	STC03		✓	CXM2000
X2			✓		
X3		STC03	✓*		
X4					
FX1	UTC09F	STC04		✓	CXN2000
FX2			✓		
FX3		STC04	✓*		
FX4					
FS1	UTC10F	STC05		✓	CTU9111 CTN9111
FS2			WPG02		
FS3		STC05	WPG02*		
FS4					

* 包裝於附件箱中/ Packed in the accessories box

氣動式切線組 Pneumatic Type Thread Trimmer

UCP -□□	下切 Under Trimmer	上切 Top Trimmer	撥線 Wiper (WPG)	抬壓腳 Presser Foot Lifter	氣閥 Valve	適用機型 Application
A1	UTB02	STB02		✓	2	CT9000
A2			✓			
A3		STB02	✓*			
A4						
A5	UTG02	✓		✓	3	CT9311 CT9085
A6			✓			
A7		✓				
A8			✓			
A9	UTH02	✓	✓*	✓	3	CT9000 上下切獨立控制
AA		✓				
AB			✓			
AC			✓*			
B1	UTB03	STB03		✓	2	CTD9000
B2			✓			
B3		STB03	✓*			
B4						
B5	UTG03	✓		✓	3	CTD9311 CTD9085
B6			✓			
B7		✓				
B8			✓			
B9	UTH03	✓	✓*	✓	3	CTD9000 上下切獨立控制
BA		✓				
BB			✓			
BC			✓*			
CA	UTB05	STB02		✓	2	CTD9060
C1			✓			
C2		STB02	✓*			
C3						
C4	UTB06	STB02		✓	2	CT9711
C5			✓			
C6		STB02	✓*			
CA						
D1	UTB07	STB03		✓	2	CTD9711 CXD2711
D2			✓			
D3		STB03	✓*			
D4						
D5	UTG11	✓		✓	3	CTD9811
D6			✓			
DA		✓				
DB			✓			
DA	UTB07B	✓		✓	2	CTD9760 CXD2760
DB			✓			
DC		STB03	✓*			
DD						
X1	UTB09	STB03		✓	2	CXM2000
X2			✓			
X3		STB03	✓*			
X4						
X5	UTG09	STB03		✓	3	CXM2311 CXM2085
X6			✓			
X7		STB03				
X8			✓			
X9	UTH09	STB03	✓*	✓	3	CXM2000 上下切獨立控制
XA			✓			
XB		STB03	✓*			
XC						
FX1	UTB09B	STB04		✓	2	CXM2060
FX2			WPC03			
FX3		STB04	WPC03*			
FX4						
FX5	UTG09F	STB04		✓	3	CXN2311
FX6			WPC03			
FX7		STB04				
FX8			WPC03			
FX9	UTH09F	STB04	WPC03*	✓	3	CXN2000 上下切獨立控制
FXA			WPC03*			
FXB		STB04	WPC03*			
FXC						
FS1	UTB10F	STB05		✓	2	CTU9111 CTN9111
FS2			WPC04			
FS3		STB05	WPC04*			
FS4						
FSA	UTB10BF	STB05		✓	2	CTU9160 CTN9160
FSC		STB05	WPC04			

* 包裝於附件箱中/ Packed in the accessories box

** 氣動UT組尾碼，無：SMC，C：氣立

空壓需求 Compressed Air	氣壓 Air Pressure (kgf/cm ²)	消耗量 * Consumption (liter/ min)
UCP (Thread Trimming Only)	4~5	10
UCP + Fabric Trimmer (CTD 9085/9311, CX 2085/2311)	5~6	40

* 經驗值供參考

* Empirical value for reference




密縫裝置 Condensed Stitch Device



CS	適用機型 Application
CS01P	CT / CTD9085
CS002	CT / CTD90□□
CS003	CT / CTD9311
CS004	CT / CTD97□□/ CXD27□□
CS005	CXM20□□
CS05P	CXM20□□/RP08 壓腳/托輪連動型 presser foot / Read puller Synchroized

空壓需求: 5kg/ cm² 或 70 psi 以上

Air compressor: 5kg/ cm² or 70 psi above

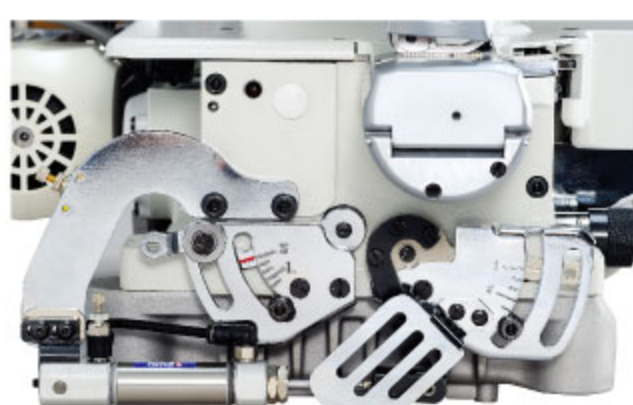

CS004



CS005/CS05P

擴張滾輪組 Tubular Extending Roller Set



	TR001	TR02A	TR03A	TR05A	TR007
TR					
標配 Standard	CT□□42	MT4504P, MT4004P MTD4504P	CT9085, CXM2085		
選配 Optional		CT□□42, CT□□11, CT9085, CXM2085		CT□□42, CT□□85, CT9085, CXM2085	氣動式, 膝動開關 Pneumatic, Knee switch

後拖輪組 Rear Puller Set

RP	適用機型 Application	上下齒輪數 Upper / Lower Rollers (Teeth)		
		A (標配) Standard	E (選配) Optional	F (CT9042) (CXM2042)
RP003□ RPC03□	CT9000 CT9300			
RP004□ RPC04□	CT9700 CXD2700	上/Upper 30 下/Lower 15	上/Upper 50 下/Lower 25	上/下輪 橡膠平輪 Upper / Lower Flat Rubber
RP008□ RPC08□	CXM20□□			



RP003□
RPC03□



RP004□
RPC04□



RP008□
RPC08□

雙重上飾線 Double Covering Stitch

DC	適用機型 Application
DC001	CTD9000
DC002	CT9000



氣壓式壓腳穩壓裝置 Pneumatic Presser Foot Pressure Regulator

AL15(A, B)


具精密調壓閥，壓腳的壓布力可精準設定，當車縫中面料厚度改變時，壓力保持穩定不變。
適用: CTD9000, CTD9711, CXD2711, CXM200.

With the air pressure valve, the pressure value is done by digital setting. When sewing across the material thickness changing, the pressure keeps constant.

AL15A
指針式
Analog




AL15B
數字式
Digital

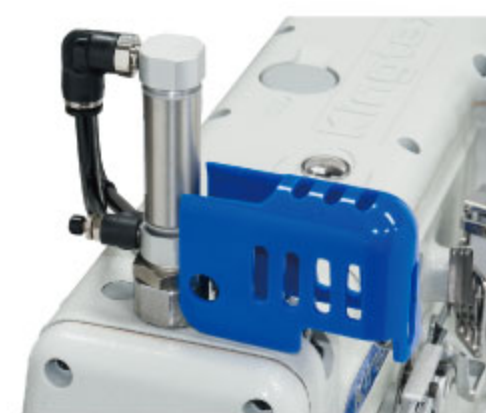

氣動式下擺折縫導布 Pneumatic Hemming Edge Guide

配備光學感應器，動作精準。
Equipped With optical sensor for accurate sewing.


EG	適用機型 Application
EG009	CT / CTD / CTU9011
EG010	CT / CTD / CTU9311

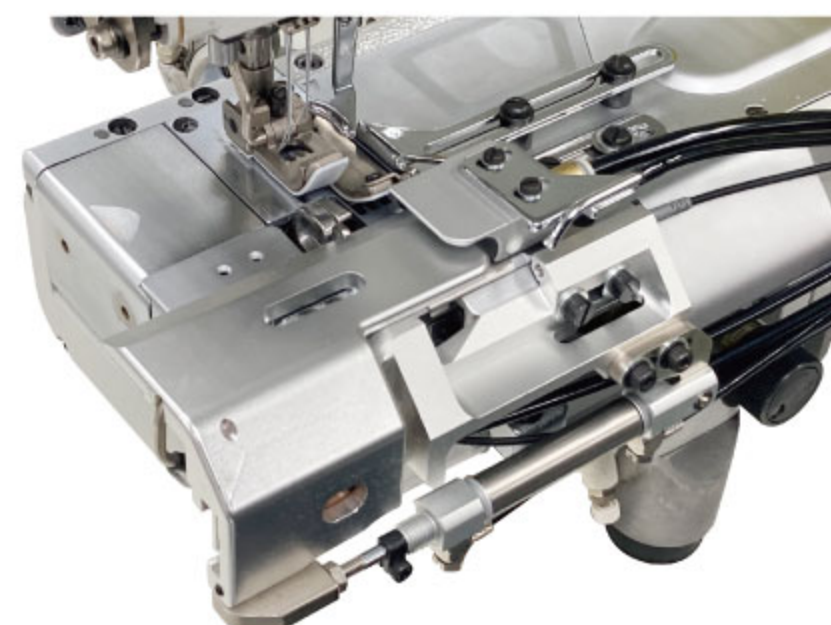

氣動式切帶 Pneumatic Tape Cutter

最大切斷寬 18mm，刀口距離壓腳 28mm
Max. cutting width 18 mm. The gap between knife and presser foot is 28 mm.

TCS	適用機型 Application
TCS31	CTD9700
TCS32	CXM2000


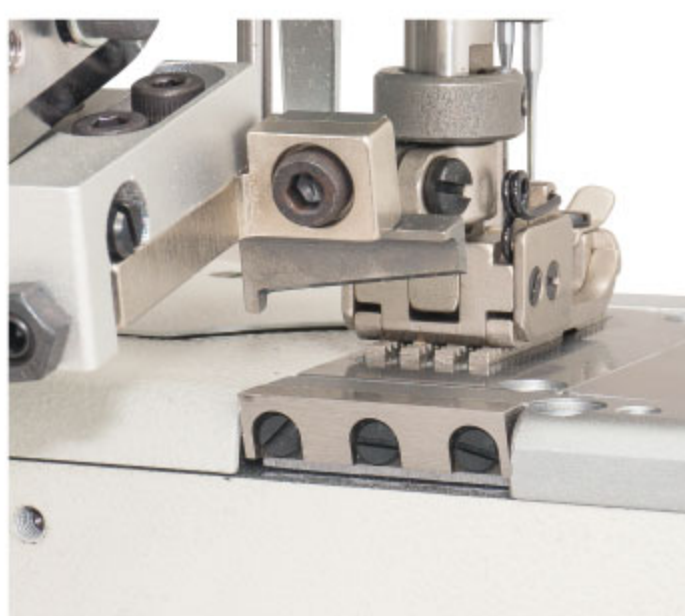


氣動式吹氣裝置
吹氣式布邊防捲裝置
Air-Blowing Type Anti-Curling Device

UN002

左切刀修布機型CT□9311適用，CTD 9811
與CXM 2311 為標準配備。

Left edge trimmer model, CT□9311, is
compatible. And it is standard equipment of
CT 9811 and CXM 2311.

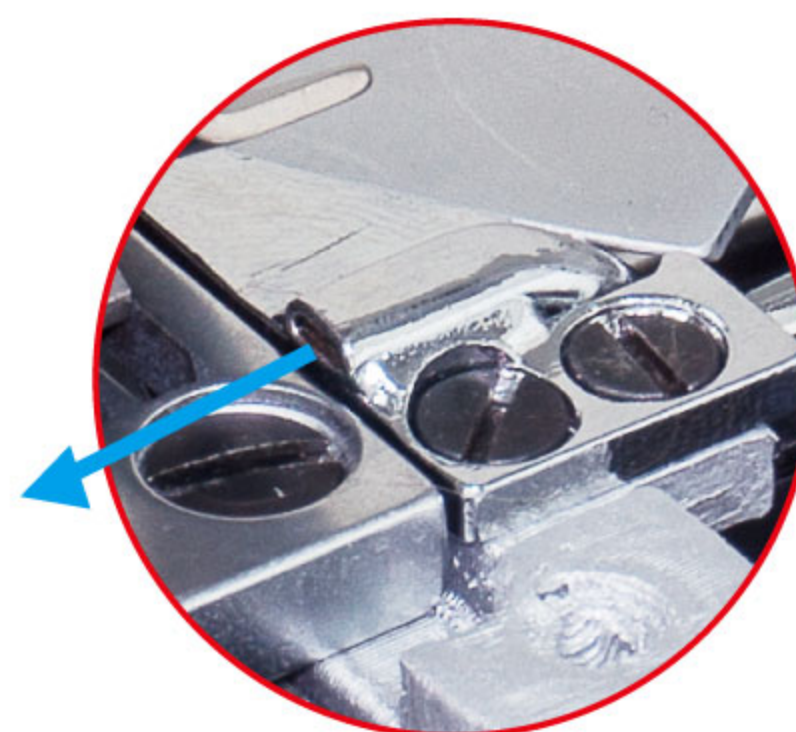
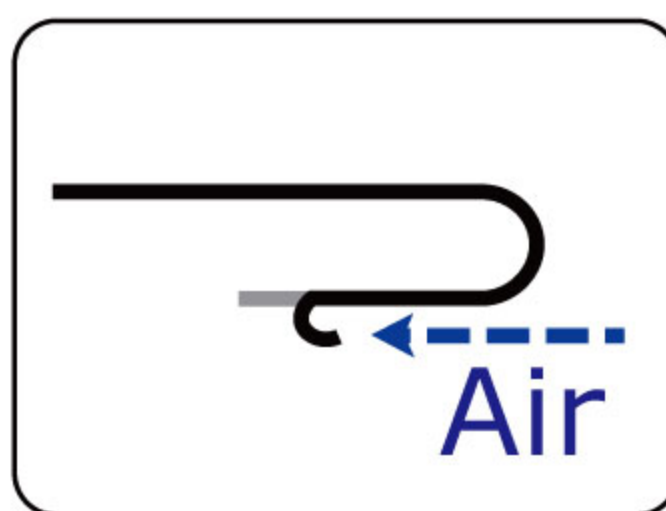


吹氣式布邊防捲裝置（專利）
Air-Blowing Type Anti-Curling Presser Foot (Patent)UN002

AF01□

□ 針位/ Gauge
A: 240/ B: 248/ C: 356/ D: 364

右切刀修布機型CT/CTD 9085與 CXM 2085 適
用，CXM 2085 為標準配備。
The right edge trimmer models, CT/CTD 9085
and CXM 2085, are
compatible. And it is standard equipment of
CXM 2085.

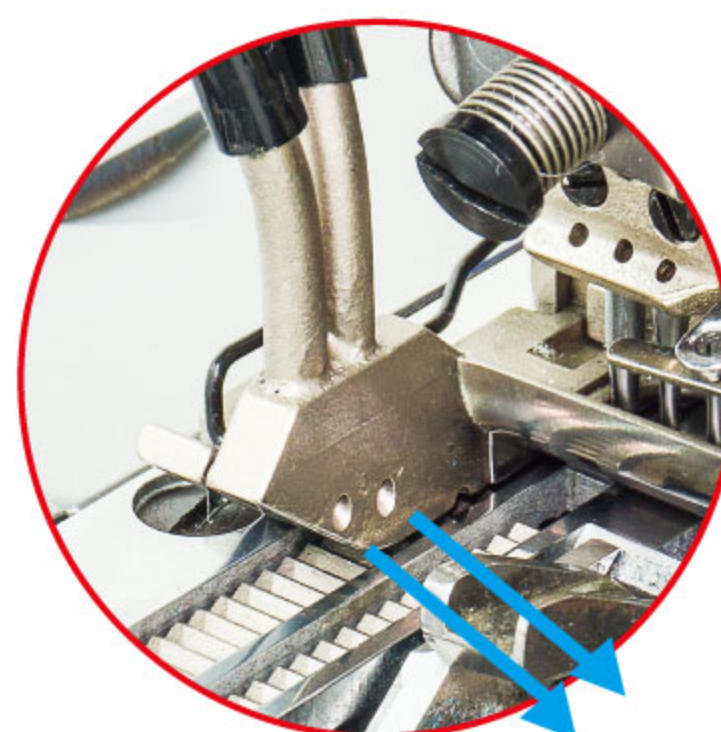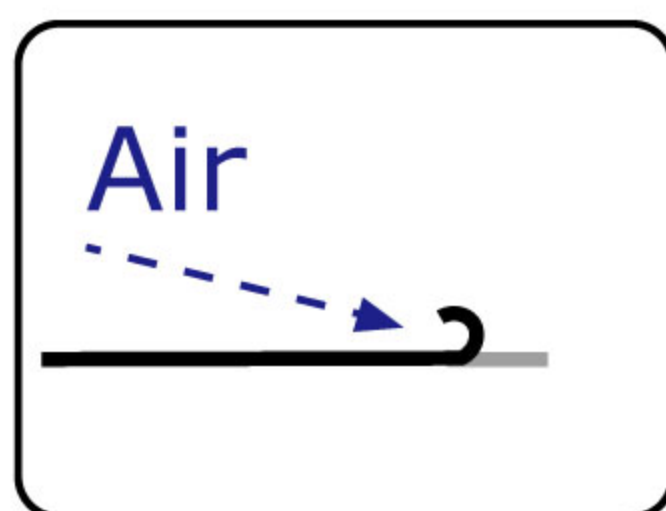

補強帶導模
Tape Binder

TB

TB 002 上送帶導布器
Top loading tape binder
TB 003 褲耳車縫
Belt loop sewing



TB 002



TB 003

步履式壓腳
Walking Foot

WF

對應送具的動作，壓腳可前後滑動，以產生最小壓布力，適用於薄布料
或易發生壓痕的面料。
Corresponding to the stroke of feed dog, the presser foot slides back
and forth to provide the minimum pressure, which is applicable
to light material or fabrics that are prone to creasing.





精機機械廠股份有限公司
CHING CHI MACHINE CO., LTD
<http://www.kingtexsewing.com.tw>

公司:新北市板橋區三民路2段33號13F

電話:(02)2961-6865 FAX:(02)2954-6007

OFFICE:13F., NO.33, Sec2, San Min Rd.Panchiao Dist
New Taipei City, 22069 Taiwan

TEL:(02)2961-6865(REP)

FAX:(02)2954-6007

E-Mail:Kingtexs@kingtexs.com.tw

